


71 HP DIESEL ENGINE



Heat Exchanger Cooled, Naturally Aspirated
3.26 Liter, 4 Cylinder Engine

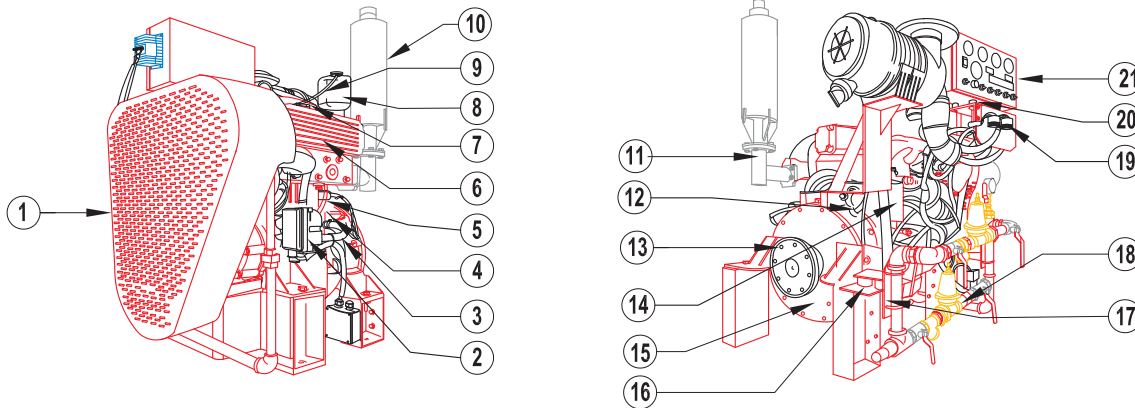

MATERIAL FEATURES & DETAILS

- | | |
|-----------------------------------|---|
| 1. safety guard front engine | 16. vibration pad |
| 2. heater assembly | 17. mounting bracket cooling loop |
| 3. heater inlet connection | 18. cooling loop piping |
| 4. battery starter solenoid | 19. start solenoid |
| 5. dipstick gauge | 20. isolator pad |
| 6. heat exchanger assembly | 21. instrument panel board/terminal box |
| 7. pressure cap coolant | |
| 8. coolant expansion tank | |
| 9. coolant expansion tube | |
| 10. muffler | |
| 11. exhaust outlet connection | |
| 12. magnetic pick up (rpm sensor) | |
| 13. flange fire pump drive | |
| 14. fuel filter | |
| 15. flywheel housing | |

MODEL FC 4085-UL


ITEM	DESCRIPTION
Air Filter	Disposable, Dry Type
Alternator	14V, 65 Amps
Coupling	Stub Shaft
Fuel Connections	Flexible, Supply and Return Lines
Fuel Filter	Spin-On Type w/ Water Separator
Fuel Injection System	In-line type, Gear Driven
Engine Heater	230V-AC, 1000 Watts
Governor Speed	Constant Speed, Mechanical
Heat Exchanger	Water to Water, Shell to Tube type
Instrumentation Panel	Tachometer, Hourmeter, Water Temperature, Oil Pressure and Two (2) Voltmeters
Lube Oil Filter	Spin-On Type
Manual Start Control	On Instrument Panel
Overspeed Control	Electronic with Reset and Test on Instrument Panel
Raw Water Solenoid Operation	Automatic from Fire Pump Controller and from Engine Instrument Panel
Stop Solenoid	12V-DC Energized to Stop
Starters	TWO (2) 12VDC
Throttle Control	Adjustable Speed Control, Tamper Proof



MODEL FC 4085-UL

Heat Exchanger Cooled, Naturally Aspirated
3.26 Liter, 4 Cylinder Engine
71 HP Diesel Engine

PERFORMANCE CURVE

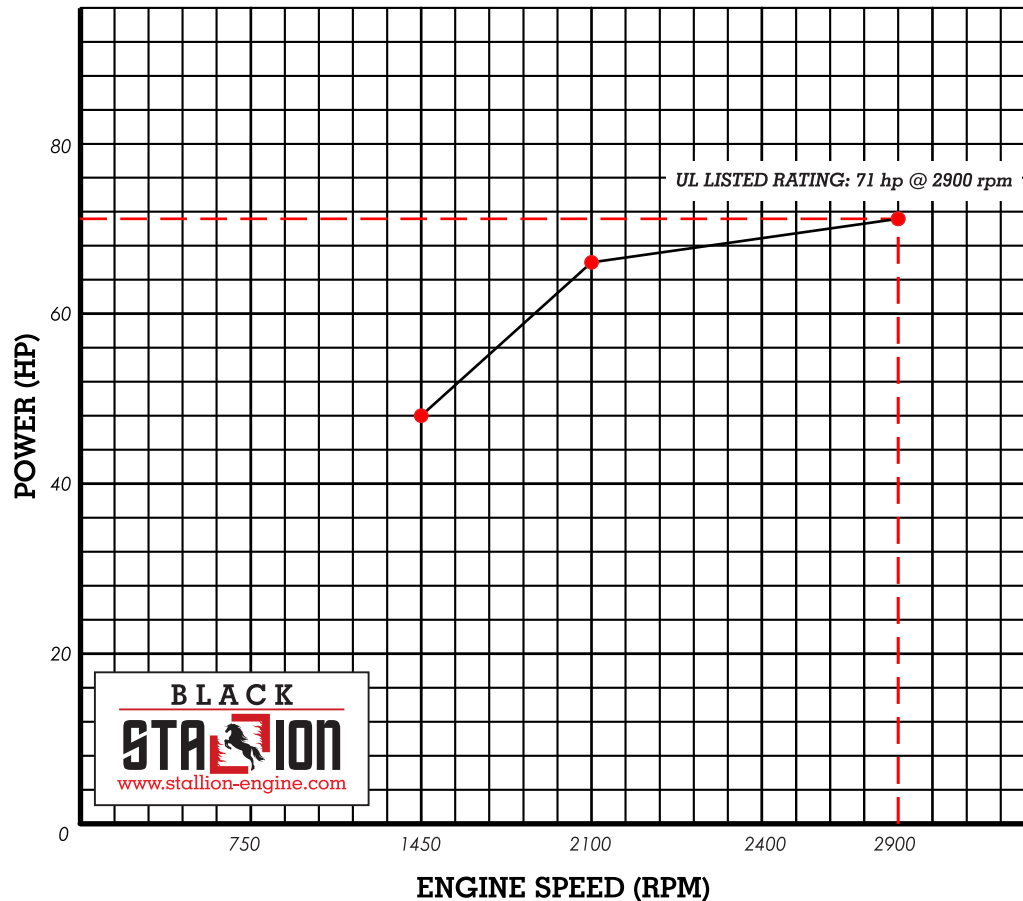

NOTE:
FOR USE IN FIRE PUMP APPLICATIONS ONLY.

ENGINE SPECIFICATION






ITEM	DESCRIPTION
Speed	2900 RPM
Rated Power	71 HP
Number of Cylinders	4
Aspiration	Naturally Aspirated
Rotation*	Clockwise
Weight – kg (lb)	530 kg. (1168.45 lb)
Compression Ratio	17.5 : 1
Displacement	3268 cc
Engine Type	4 Stroke Cycle - Inline Construction
Bore & Stroke	102 mm X 100 mm
Fuel Consumption	16.6728 Kg./Hr
Voltage	12 VOLTS
Exhaust Temperature	550°C
Back Pressure	Not more than 15 Kpa
Raw Water Inlet Size	1 inch
Max. Raw Water Pressure	60 psi
Min. Raw Water Flow	19 gpm
Water Jacket Heater Size	1000 W, 240 VAC

* ROTATION VIEWED FROM HEAT EXCHANGER/FRONT OF ENGINE

- Each engine is factory tested to verify power and performance.
- Engines are to be used for stationary emergency standby fire pump service only. Engines are to be tested in accordance with NFPA 25.
- Engines are rated at standard SAE conditions of 29.61 in. (752.1 mm) Hg barometer and 77°F (25°C) inlet air temperature (approximates 300 ft (91.4 m) above sea level) by the testing laboratory (see SAE Standard J 1349).
- A deduction of 3 percent from engine horsepower rating at standard SAE conditions shall be made for diesel engines for each 1000 ft. (305 m) altitude above 300 ft. (91.4 m)
- A deduction of 1 percent from engine horsepower rating as corrected to standard SAE conditions shall be made for diesel engines for every 10°F (5.6°C) above 77°F (25°C) ambient temperature.

MODEL FC 4085-UL

Heat Exchanger Cooled, Naturally Aspirated
3.26 Liter, 4 Cylinder Engine
71 HP Diesel Engine

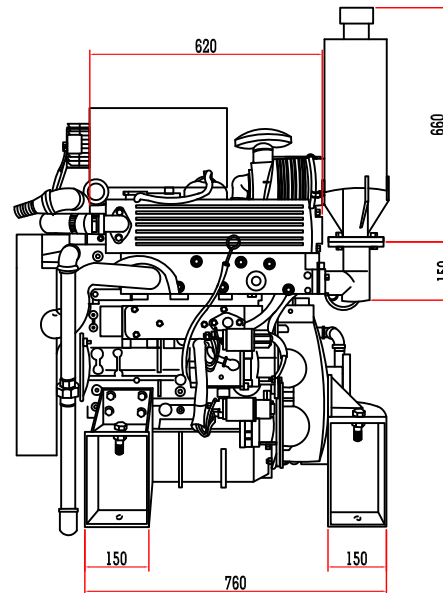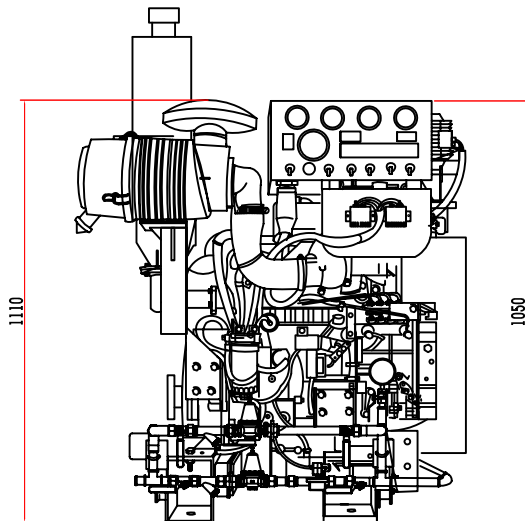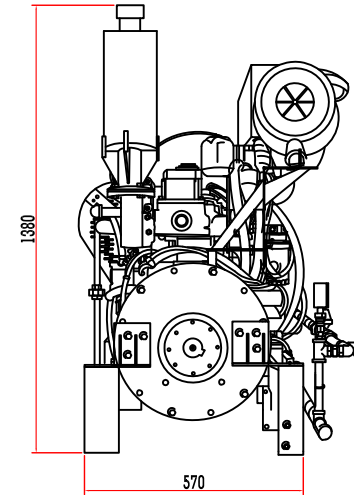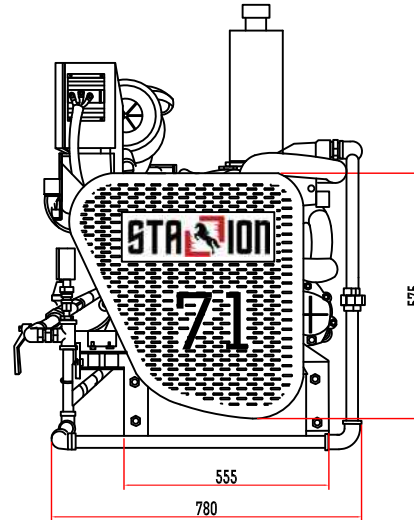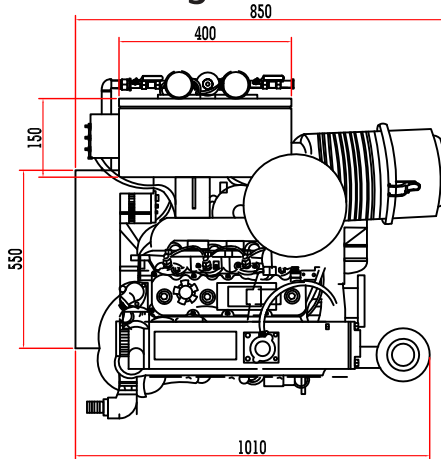

NOMENCLATURE	FC	4	085	-UL
	STALLION BASE MODEL	NO. OF CYLINDERS	RAW HP	UL LISTED

BLACK
STALLION
www.stallion-engine.com

*NOTE:
DRAWINGS SUBJECT TO CHANGE WITHOUT NOTICE*



BLACK

STALLION
www.stallion-engine.com

