


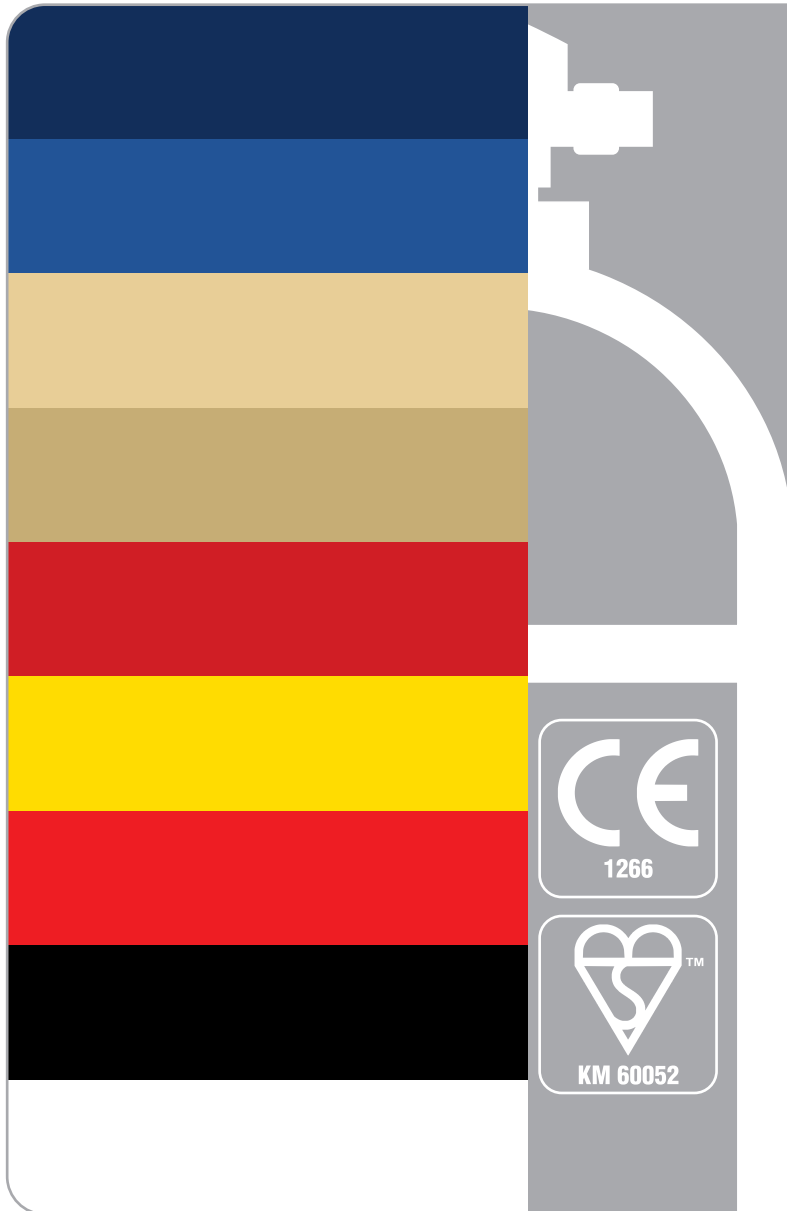


EN3 SERIES OF EXTINGUISHERS

**RIGHT EXTINGUISHER TYPE
FOR THE RIGHT FIRE TYPE**

RE-ENGINEERED

**WORLD'S LARGEST
EN3 APPROVED RANGE**

**HIGHEST FIRE RATINGS
IN THE MARKET**

ADVANCED TECHNOLOGY



SFFECO.com

THE

RANGE

1kg ABC Powder
2kg ABC Powder
3kg ABC Powder
4kg ABC Powder
6kg ABC Powder
6kg ABC Powder High Performance
9kg ABC Powder
12kg ABC Powder
6kg ABC Powder Cartridge
9kg ABC Powder Cartridge

4kg BC Powder
6kg BC Powder
9kg BC Powder

3Ltr AFFF Foam
6Ltr AFFF Foam
6Ltr High Performance Foam
9Ltr AFFF Foam
6Ltr AFFF Foam Cartridge
9Ltr AFFF Foam Cartridge
6Ltr AFFF Foam Cartridge High Performance
9Ltr AFFF Foam Cartridge High Performance

6Ltr AR Foam
9Ltr AR Foam

6Ltr Water
9Ltr Water
9Ltr Water with Freeze Protected -20°C
9Ltr Water Cartridge

3Ltr Wet Chemical
6Ltr Wet Chemical

3Ltr Aqua Spray
6Ltr Aqua Spray

2kg CO2 Carbon Steel
5kg CO2 Carbon Steel

3L Water Mist
6L Water Mist

**SFFECO**
firefix
EN3 SERIES OF EXTINGUISHERS



The new re-engineered SFFECO FireFix range of fire extinguishers is a revolutionary re-engineered product range manufactured strictly under ISO9001 processes, British Standards Institute (BSI) (BS EN3) and Pressure Equipment Directive (P.E.D / CE) approvals; ensuring you the absolute quality available in any market.

With more than 3 Decades of Excellence, it is only natural that SFFECO brings out this new highly engineered and largest range of extinguishers all EN3 approved and carrying the highest fire ratings. The SFFECO's Research and Development department knows and understands fire and the damage it can cause in mere seconds. That is why SFFECO has spent significant amount of time and money engineering and approving a product that WILL work when you need it and will do exactly the job that it is designed to do everytime (as long as it is maintained as per specifications).

No longer should the customer accept the one type fits all approach. Not just an extinguisher should be selected for the fire risk but the BEST type of extinguisher agent should be selected.



FX3D 3 LTR AFFF FOAM 6% AQUEOUS FILM FORMING FOAM



SFFECO
firefix
EN3 SERIES OF EXTINGUISHERS

AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FX3D 3 LTR AFFF FOAM

SFFECO.com



 13A 70B FIRE RATING Class E upto 35 kV	 6% AFFF FOAM AGENT	 3 LTR CAPACITY	 NITROGEN PROPELLANT N_2	 +5°C - +60°C OPERATING TEMPERATURE
 12 BAR WORKING PRESSURE	 27 BAR TEST PRESSURE	 23.0 SEC DISCHARGE TIME	 >4.5 MTR RANGE OF THROW	 PVC 10 408 MM HOSE TYPE AND LENGTH
 428 MM HEIGHT	 130 MM DIAMETER	 5.1 KG FILLED WEIGHT	 STEEL LOW-CARBON MATERIAL	

**DECADES
EXCELLENCE**

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FX6D 6 LTR AFFF FOAM

6% AQUEOUS FILM FORMING FOAM



SFFECO
firefix
EN3 SERIES OF EXTINGUISHERS

AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FX6D 6 LTR AFFF FOAM

SFFECO.com



 21A 144B FIRE RATING Class E upto 35 kV	 6% AFFF FOAM AGENT	 6 LTR CAPACITY	 NITROGEN PROPELLANT N₂	 +5°C - +60°C OPERATING TEMPERATURE
 12 BAR WORKING PRESSURE	 27 BAR TEST PRESSURE	 21.0 SEC DISCHARGE TIME	 >5.0 MTR RANGE OF THROW	 PVC 10 518 MM HOSE TYPE AND LENGTH
 534 MM HEIGHT	 163 MM DIAMETER	 9.8 KG FILLED WEIGHT	 STEEL LOW-CARBON MATERIAL	

DECADES
of
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FXH6D

6 LTR AFFF FOAM - HIGH PERFORMANCE
16.7% HP FOAM
HIGH PERFORMANCE



AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FXH6D

6 LTR AFFF FOAM - HIGH PERFORMANCE

HIGH PERFORMANCE

SFFECO.com



27A 183B FIRE RATING Class E upto 35 kV	16.7% HP FOAM AGENT	6 LTR CAPACITY	NITROGEN PROPELLANT	+5°C - +60°C OPERATING TEMPERATURE
12 BAR WORKING PRESSURE	27 BAR TEST PRESSURE	33.0 SEC DISCHARGE TIME	>5.0 MTR RANGE OF THROW	PVC 13 518 MM HOSE TYPE AND LENGTH
534 MM HEIGHT	163 MM DIAMETER	9.8 KG FILLED WEIGHT	STEEL LOW-CARBON MATERIAL	

DECADES
of
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FX9D 9 LTR AFFF FOAM

6% AQUEOUS FILM FORMING FOAM



AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FX9D 9 LTR AFFF FOAM

SFFECO.com



27A 183B FIRE RATING Class E upto 35 kV	6% AFFF FOAM AGENT	9 LTR CAPACITY	NITROGEN PROPELLANT	+5°C - +60°C OPERATING TEMPERATURE
12 BAR WORKING PRESSURE	27 BAR TEST PRESSURE	33.0 SEC DISCHARGE TIME	>6.0 MTR RANGE OF THROW	PVC 13 578 MM HOSE TYPE AND LENGTH
586 MM HEIGHT	183 MM DIAMETER	13.5 KG FILLED WEIGHT	STEEL LOW-CARBON MATERIAL	

DECADES
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FXC6D

6 LTR AFFF FOAM - INSIDE CARTRIDGE
6% AQUEOUS FILM FORMING FOAM
INSIDE CARTRIDGE



AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FXC6D

6 LTR AFFF FOAM - INSIDE CARTRIDGE

INSIDE
CARTRIDGE

SFFECO.com



 21A 144B FIRE RATING Class E upto 35 kv	 6% AFFF FOAM AGENT	 6 LTR CAPACITY	 CO ₂ CARTRIDGE PROPELLANT	 +5°C - +60°C OPERATING TEMPERATURE
 12 BAR WORKING PRESSURE	 27 BAR TEST PRESSURE	 29.0 SEC DISCHARGE TIME	 >5.0 MTR RANGE OF THROW	 EPDM 13 520 MM HOSE TYPE AND LENGTH
 554 MM HEIGHT	 163 MM DIAMETER	 10.6 KG FILLED WEIGHT	 STEEL LOW-CARBON MATERIAL	

DECADES
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FXC9D

9 LTR AFFF FOAM - INSIDE CARTRIDGE
6% AQUEOUS FILM FORMING FOAM
INSIDE CARTRIDGE



SFFECO
firefix
EN3 SERIES OF EXTINGUISHERS

AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	FACTORIES	WAREHOUSES	RESTAURANTS	HOTELS
CHEMICAL PLANTS	TRANSPORT SYSTEMS	PUBLIC LOCATIONS	EDUCATION FACILITIES	CONFINED SPACES

a product of **SFFECO**



FXC9D

9 LTR AFFF FOAM - INSIDE CARTRIDGE

INSIDE
CARTRIDGE

SFFECO.com



 21A 183B FIRE RATING Class E upto 35 kV	 6% AFFF FOAM AGENT	 9 LTR CAPACITY	 CO ₂ CARTRIDGE PROPELLANT	 +5°C - +60°C OPERATING TEMPERATURE
 12 BAR WORKING PRESSURE	 27 BAR TEST PRESSURE	 45.0 SEC DISCHARGE TIME	 >6.0 MTR RANGE OF THROW	 EPDM 13 580 MM HOSE TYPE AND LENGTH
 610 MM HEIGHT	 183 MM DIAMETER	 14.8 KG FILLED WEIGHT	 STEEL LOW-CARBON MATERIAL	

DECADES
of
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FXHC6D

6 LTR AFFF FOAM

HIGH PERFORMANCE INSIDE CARTRIDGE

16.7% HP FOAM



AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	FACTORIES	WAREHOUSES	RESTAURANTS	HOTELS
CHEMICAL PLANTS	TRANSPORT SYSTEMS	PUBLIC LOCATIONS	EDUCATION FACILITIES	CONFINED SPACES

a product of **SFFECO**



FXHC6D

6 LTR AFFF FOAM - HIGH PERFORMANCE INSIDE CARTRIDGE

HIGH PERFORMANCE INSIDE CARTRIDGE

SFFECO.com



27A 183B FIRE RATING Class E upto 35 kV	16.7% HP FOAM AGENT	6 LTR CAPACITY	CO₂ CARTRIDGE PROPELLANT	+5°C - +60°C OPERATING TEMPERATURE
12 BAR WORKING PRESSURE	27 BAR TEST PRESSURE	35.0 SEC DISCHARGE TIME	>5.0 MTR RANGE OF THROW	EPDM 13 520 MM HOSE TYPE AND LENGTH
554 MM HEIGHT	163 MM DIAMETER	10.6 KG FILLED WEIGHT	STEEL LOW-CARBON MATERIAL	

DECADES
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء





FXHC9D

9 LTR AFFF FOAM

HIGH PERFORMANCE INSIDE CARTRIDGE

16.7% HP FOAM



AQUEOUS FILM FORMING FOAM works by firstly applying a film forming foam (bubbles) to the fire which causes a blanket over the fire suffocating the fire, while almost simultaneously cooling the fire.



FEATURES

- EN3 Kitemark approval by BSI in the UK and CE marked
- High fire ratings offering maximum fire fighting ability with minimum size and weight
- Revolutionary new CE aluminium valve design
- Specially designed nozzle for maximum agitation and the best discharge accuracy and time
- Safe for inadvertent use on electrical items upto 35kv.
- Suitable for use in a confined spaces
- Easy to Empty and refill onsite without mess or special filling machinery
- Available in 3, 6 & 9 Litres, cartridge and High Performance versions

INDUSTRIES

OFFICES	✓	FACTORIES	✓	WAREHOUSES	✓	RESTAURANTS	✓	HOTELS	✓
CHEMICAL PLANTS	✓	TRANSPORT SYSTEMS	✓	PUBLIC LOCATIONS	✓	EDUCATION FACILITIES	✓	CONFINED SPACES	✓

a product of **SFFECO**



FXHC9D

9 LTR AFFF FOAM - HIGH PERFORMANCE INSIDE CARTRIDGE

HIGH
PERFORMANCE
INSIDE
CARTRIDGE

SFFECO.com



 34A 233B FIRE RATING Class E up to 35 kV	 16.7% HP FOAM AGENT	 9 LTR CAPACITY	 CO₂ CARTRIDGE PROPELLANT	 +5°C - +60°C OPERATING TEMPERATURE
 12 BAR WORKING PRESSURE	 27 BAR TEST PRESSURE	 45.0 SEC DISCHARGE TIME	 >6.0 MTR RANGE OF THROW	 EPDM 13 580 MM HOSE TYPE AND LENGTH
 610 MM HEIGHT	 183 MM DIAMETER	 14.8 KG FILLED WEIGHT	 STEEL LOW-CARBON MATERIAL	

DECADES
of
EXCELLENCE

SAUDI FACTORY FOR FIRE EQUIPMENT
المصنع السعودي لأجهزة الإطفاء



SAUDI FACTORY FOR FIRE EQUIPMENT
reserves the right to make revisions to its
products and their specifications, and to this
catalogue and related information, without
prior notice. All products must be installed
and maintained in accordance with
applicable instructions and/or standards.

SFFECO
GLOBAL
enterprise



SAUDI FACTORY FOR FIRE EQUIPMENT المصنع السعودي للأجهزة الإطفاء

